




Phonak Sky M-M (M90/M70/M50/M30/Trial)

Standard and Mini Earhook HE11 680


2 cm³ coupler data

ANSI / ASA S3.22-2014 (R2020)
IEC 60118-0: 2022

Output sound pressure level

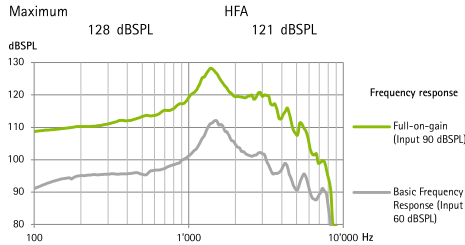

Acoustic gain

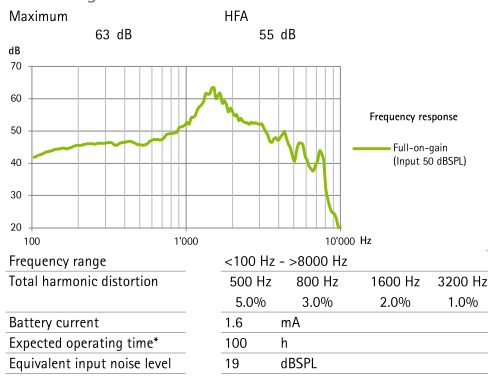


SlimTube HE


2 cm³ coupler data

ANSI / ASA S3.22-2014 (R2020)
IEC 60118-0: 2022


Output sound pressure level

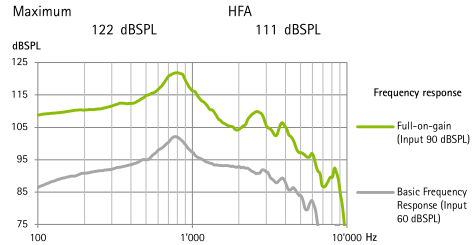


Acoustic gain

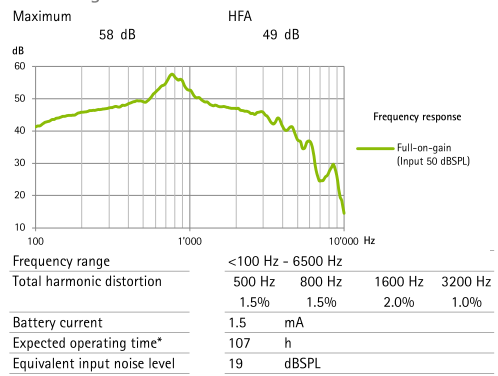

Induction coil sensitivity

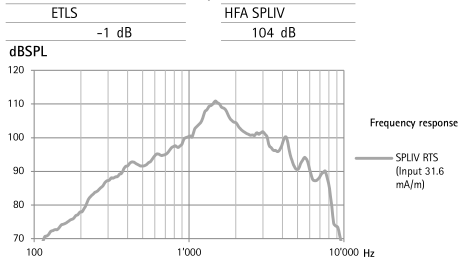

Induction coil sensitivity

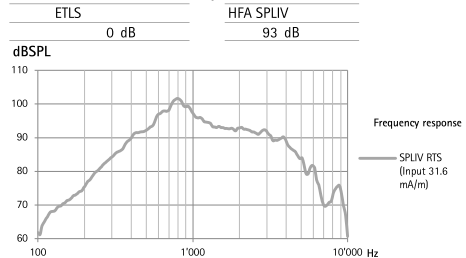

General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms

Warnings

- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

* Battery performance depends on active features, the use of wireless accessories, hearing loss, battery age, sound environment and earpiece. Note that for non-rechargeable ZnAir batteries operating time might vary depending on the battery model