

Phonak Terra™ + Phonak Terra™

Product information

Phonak Terra+ and Phonak Terra provide a balanced set of features for a personalized hearing experience with RIC and BTE.



Product description



		Terra+ RIC-312 Terra RIC-312	Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP
Battery size		312	312	13	675
Telecoil			•	•	•
Bluetooth®		•	•	•	•
Hydrophobic coating		•	•	•	•
IP rating		IP68 ¹	IP68 ¹	IP68 ¹	IP68 ¹
Dimensions	L x W x D	26.8 x 11.2 x 7.1 mm (1.05 x 0.44 x 0.28")	31.3 x 14.16 x 7.3 mm (1.23 x 0.56 x 0.29")	40.0 x 16.9 x 8.5 mm (1.57 x 0.67 x 0.33")	42.2 x 18.8 x 8.6 mm (1.68 x 0.74 x 0.34")
	Weight	1.1 g (0.04 oz)	2.2 g (0.08 oz)	4.4 g (0.16 oz)	4.6 g (0.16 oz)

Housing colors

Terra+



H0
Beige



P1
Sand Beige



P3
Sandalwood



P6
Silver Gray

Terra



H0
Beige



P3
Sandalwood




P6
Silver Gray

¹ IP68 indicates that the hearing aid is water and dust resistant. It survived continuous immersion in 1 meter of fresh water for 60 minutes and 8 hours in a dust chamber as per the IEC60529 standard. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sonova AG is under license.


Acoustic coupling – RIC hearing instruments

Length	S Receiver	M Receiver	P Receiver	UP Receiver
Available in four different lengths (0, 1, 2, 3), left and right	•	•	•	•
Dome				
Cap dome	•	•	•	
Open dome Available in three sizes (S, M, L)	•	•	•	
Vented dome Available in three sizes (S, M, L)	•	•	•	
Power dome Available in three sizes (S, M, L)	•	•	•	
SlimTip*				
Acrylic	•	•	•	
Silicone	•	•	•	
cShell				
Acrylic	•	•	•	•
Titanium	•	•	•	•
2cc coupler data				
Max. Power Output (dB SPL)	111	114	122	132
Max. gain (dB)	47	51	59	71
Frequency range (Hz)	<100 - >8000	<100 - >8000	<100 - 6300	<100 - 6100


Fitting ranges




Mild to moderately-severe hearing loss.



Mild to severe hearing loss.



Mild to severe hearing loss.




Moderate to profound hearing loss.

* Available with extra canal length option

Acoustic coupling – BTE hearing instruments

		Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP			
Sound outlet							
Standard earhook	Damped (HE11 680), transparent	•	•	•			
	Undamped (HE11), transparent		•	•			
SlimTube 4.0	Available in left and right in five different lengths (00,0,1,2,3)	•	•				
Earpiece for SlimTube							
Dome	Cap dome	•	•				
	Open dome Available in three sizes (S, M, L)	•	•				
	Vented dome Available in three sizes (S, M, L)	•	•				
	Power dome Available in three sizes (S, M, L)	•	•				
SlimTip	Acrylic	•	•				
	Silicone	•	•				
Earpiece for hook							
Earmold		•	•	•			
2cc coupler data		HE11 680	SlimTube 4.0	HE11 680	HE11	HE11 680	HE11
Max. Power Output (dB SPL)	2 cc coupler	128	122	133	139	134	141
Max. gain (dB)	2 cc coupler	63	58	75	81	78	84
Frequency range (Hz)		<100 - >7800	<100 - >8000	<100 - >5700	<100 - >4900	<100 - >4700	<100 - >4700
Working current (mA)		1.6	1.6	2.2	2.1	2.8	3.3

Fitting ranges

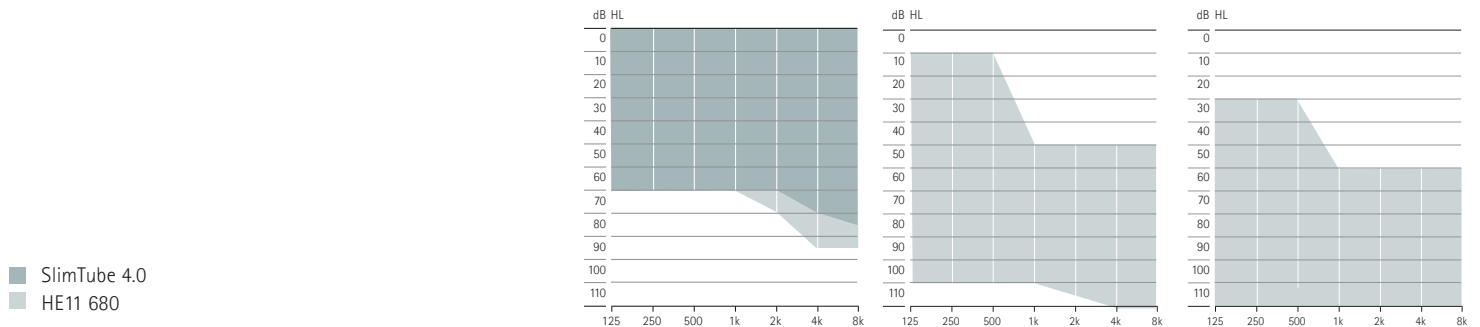

Mild to moderate hearing loss, all audiometric configurations

Mild to severe hearing loss, all audiometric configurations

Severe to profound hearing loss, all audiometric configurations

Performance levels

	Terra+	Terra
	RIC-312/BTE-UP/BTE-SP/BTE-M	RIC-312/BTE-UP/BTE-SP/BTE-M
AutoSense OS™ 5.0		
Speech in Noise	•	•
Calm Situation	•	•
AutoSense OS 5.0 (streaming)		
Media speech + mic	•	•
Media music + mic	•	
Additional programs		
Max. additional programs	4	4
Speech in Noise	•	•
Calm Situation	•	•
Comfort in Noise	•	
Music	•	
Acoustic phone	•	•
Custom program	•	•
Phone via T-coil ± mic ²	•	•
Public T-coil ± mic ²	•	•
Streaming programs		
PartnerMic + mic	•	
Phone call + mic	•	•

	Terra+	Terra
	RIC-312/BTE-UP/BTE-SP/BTE-M	RIC-312/BTE-UP/BTE-SP/BTE-M
Features		
UltraZoom	•	•
Broadband Booster ¹	•	•
User Preference Tuning	•	•
Auto Acclimatization	•	•
Environmental balance	•	•
SoundRecover2	•	
SoundRecover	•	•
WhistleBlock	•	•
NoiseBlock	•	•
QuickSync	•	•
AOV	•	•
Fine tuning channel	10	8

¹ Available for Phonak Terra+ BTE-UP and Phonak Terra BTE-UP only
² Available for BTE products only

Wireless communication portfolio

	Terra+	Terra
	RIC-312/BTE-UP/BTE-SP/BTE-M	RIC-312/BTE-UP/BTE-SP/BTE-M
Wireless accessory		
TV Connector	•	
Phonak PartnerMic™	•	
Phonak RemoteControl	•	
Apps		
myPhonak	•	

Fitting

	Terra+ RIC-312 Terra RIC-312	Terra+ BTE-M Terra BTE-M	Terra+ BTE-SP Terra BTE-SP	Terra+ BTE-UP Terra BTE-UP
Phonak Target	9.1 or higher	9.1 or higher	9.1 or higher	9.1 or higher
Noahlink Wireless, Noahlink Wireless 2	•	•	•	•
NOAHLINK			•	•
HI-PRO, HI-PRO2			•	•

For more information please visit www.phonak.com/terra

For more information about myPhonak please visit www.phonak.com/apps

life is on

Since 1947, Phonak is dedicated to preserving life quality by opening new acoustic worlds. Already back then, in the days of our foundation, our company was driven by a formative conviction: We believe that well-hearing equates to well-being and thus is essential for living life to the fullest. In fact, the sense of hearing is directly linked to social, emotional, cognitive and physical well-being. Today as in future, we thrive to offer the broadest portfolio of innovative hearing solutions. And, together with our hearing care professionals, we keep on focusing on what matters most: improving speech understanding, changing people's lives and having a positive effect on society as a whole.

www.phonak.com



027-0706-02/N2-00/2024-02/ja © 2024 Sonova AG All rights reserved